

AUTOZON[®]
ENTRANCE AUTOMATION



CURTAIN OPERATOR



CURTAIN OPERATOR

LOOP



FEATURES



Smooth Running



High Technology



Super Silent



Wireless Remote



Do it yourself

PRODUCT DESCRIPTION:


- o Manual start: Pull curtain about 10cm by hand, curtain will open or close automatically
- o Manual operation is enable in the absence of power supply
- o Middle position set: Stop location can be set at the middle for better lighting
- o Multiple controls: Remote control ,switch, or smart remote control used accordingly.
- o Automatically set memory running point: After powering off, the motor will set running point for opening and closing again when power on.
- o Customized track length: DIY design, get any length needed.

www.autozonind.com

AUTOZON®



SMART CURTAIN KIT:

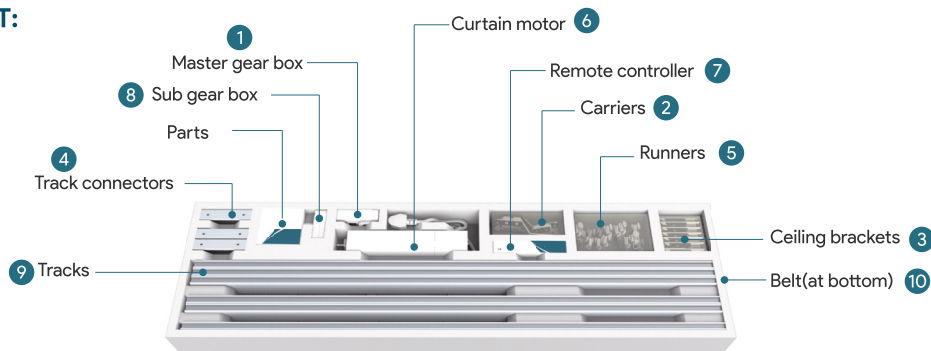

TECHNICAL SPECIFICATION:



NORMAL POWER MOTOR - AZ CO 1.2 Nm 5W

Rated Torque : 1.2 Nm
Rated Voltage : 220 V - 240 V AC
Rated Power : 40 W
Max Load : 50 Kg
Remote Distance : >50m
Protection Class : IP 20



HIGH POWER MOTOR - AZ CO2 Nm 5W

Rated Torque : 2 Nm
Rated Voltage : 220 V - 240 V AC
Rated Power : 80 W
Max Load : 120 Kg
Remote Distance : >50m
Protection Class : IP 20



TUYA MOTOR - AZ CO TUYA 30


Rated Torque : 1.2 Nm
Rated Voltage : 220 V - 240 V AC
Rated Power : 40 W
Max Load : 50 Kg
Remote Distance : >50m
Protection Class : IP 20



ACCESSORIES:



AZ CO SWO2
Single Track
Wall Clamp



AZ CO 9006
90° Track



AZ CO DWO3
Double Track
Wall Clamp



AZ CO 135 31
135° Track

TRANSMITTER:



AZ COSC29
Single Channel Transmitter



AZ CODC 26
Two Channel Transmitter



AZ COMC 27
Multi Channel Transmitter

TRACK SPECIFICATION:


Model No.	Size	Track Length (mm)	Track Connector (mm)	Adjustable Track					Suitable Size (M) (Wall To Wall)
				Track Length (mm)			Track Connector (mm)		
				500	200	100	200	100	
AZ CO 3.2	3.2 m	2	2	1	2	1	1	1	2.2 m - 3.2 m
AZ CO 5.2	5.2 m	4	4	1	2	1	1	1	4.2 m - 5.2 m
AZ CO 7.2	7.2 m	6	6	1	2	1	1	1	6.2 m - 7.2 m

Note: 500 mm, 200 mm, 100 mm tracks are adjustable track, 200 mm, 100 mm are track connectors | Optional accessories: Side mounting brackets, 90° angle




LIFT CURTAIN OPERATOR

SPOT

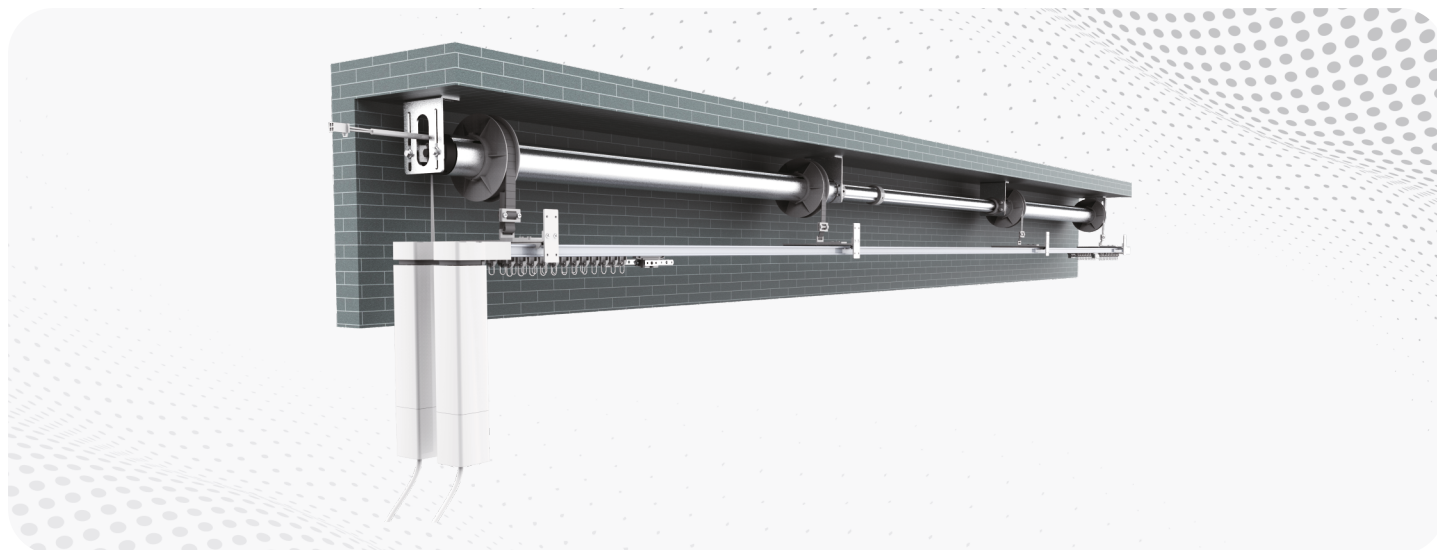

FEATURES



Assemble Lift



Super Silent



Easy Installation



Smooth Running



Large Load



Assemble Fast


PRODUCT DESCRIPTION:

- o With adoption of easy disassembly design, it is easy to assemble and disassemble the motor
- o Used for straight curtain tracks
- o The motor has been patented on clutch, and the stroke designed to be automatic manually operated and remote operated.
- o Radio receiver can be made inside or outside of motor, can also be connected with other control systems, easy to make smart control
- o Minimal noise, minimal vibrate
- o High quality full coating track, moved by belt with stainless steel wires




LIFT CURTAIN OPERATOR


SPOT

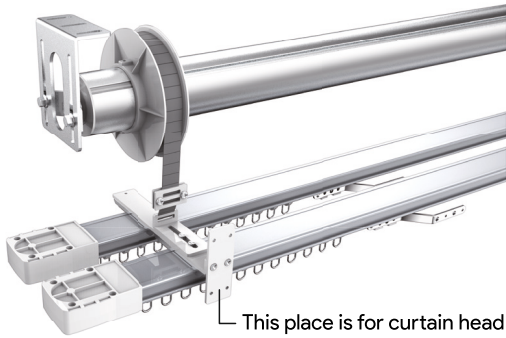

This place is for curtain head

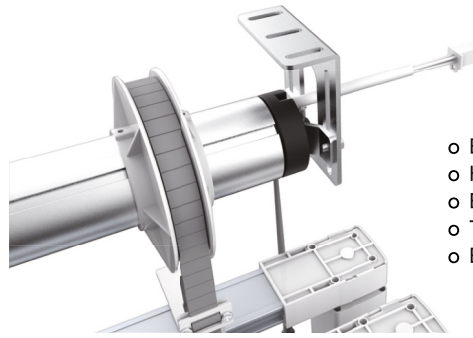

- o Easy to install
- o High strength, strong and durable belt
- o Easy to adjust
- o Terminal for tubular motor
- o Easy to connect wires

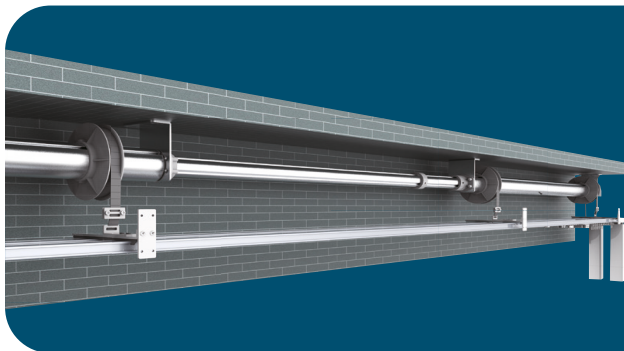

EXAMPLES OF ASSEMBLY LENGTH:

5m Set: Adjustable extent 3.078m - 4.964m



3m Set: Adjustable extent 2.078m - 3.018m




LIFT SYSTEM:

- o Inducted high quality tubular motor for enhanced power supply
- o Easy to control, stable operation
- o The motor has been patented on clutch
- o The stroke designed to be automatic manually operated and remote operated
- o Radio receiver can be made inside or outside, can also be connected with other control systems, easy to make smart control

Rise



Descend



TRANSMITTER & RECEIVER:




AZCOSC30
Single Channel
Transmitter



AZLCOR01
Receiver

PATENTED TELESCOPIC STRUCTURE SYSTEM:



- o Standardized assembly scheme
- o Systematic design
- o Adjustable size
- o Easy to assemble

TECHNICAL SPECIFICATION:

Rated Power : 270 W	Rated Torque : 50 Nm
RPM : 12 rpm / min	Rated Voltage : 220 V - 240 V AC
Warranty : 3 Yrs	Protection Level : IP 44

TECHNICAL SPECIFICATION:

MODEL NO	ASSEMBLY SIZE	TRACK SIZE
AZ LCO 3 M	3 m	2.078 m - 3.018 m
AZ LCO 5M	5m	3.078 m - 4.964 m

AUTOZON®
ENTRANCE AUTOMATION




BLINDS OPERATOR



BLINDS OPERATOR

FLY

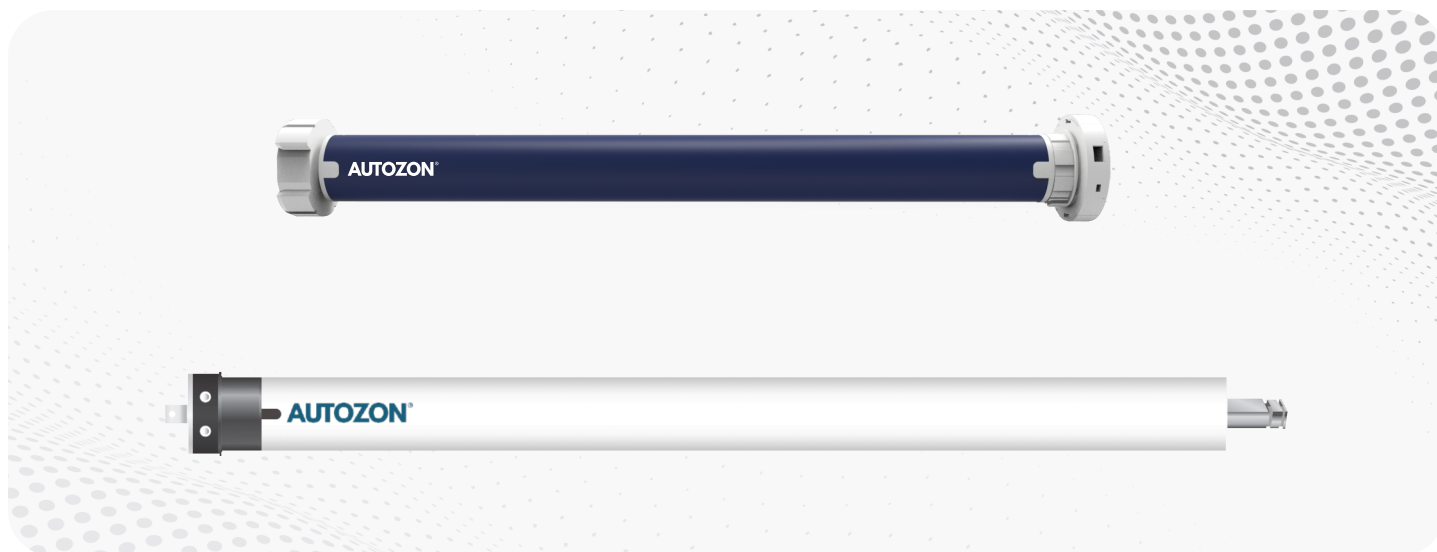

FEATURES



Smooth Running



Large Load



Super Silent



Wireless Remote




Built in receiver

PRODUCT DESCRIPTION:


- o Tubular Operator is mainly used for roller, honeycomb, venetian & awnings blinds etc..
- o Built in receiver, can realize variety of control functions
- o Mechanical & electronic limit switch, with accurate limit position
- o Flexible control mode: single control, group control and packet control can be achieved.
- o Over load protection function
- o Easy installation and smooth running, dB level below 38dB

www.autozonind.com


AUTOZON®

APPLICATIONS:



Motorized
Roller Blinds




Motorized
Wooden Venetian Blinds




Motorized
Roman Blinds




Motorized
Pleated Blinds




Motorized
Sheer Blinds




Motorized
Awning



Motorized
Roller Shutter



Motorized
Honeycomb Blinds



Motorized
Banner Lifter



Motorized
Projection Screen

TRANSMITTER:


AZ BOT 01
Single Channel





AZ BOT 02
Four Channel



AZ BOT 03
Sixteen Channel



AZ BOT 04
Single Channel



TECHNICAL SPECIFICATIONS:	AZBO25R	AZBO35R6	AZBO35R13
Rated Torque	1.1 Nm	6 Nm	13 Nm
Rated Speed	30 RPM	28 RPM	14 RPM
Power Supply Voltage	220 V - 240 V AC	220 V - 240 V AC	220 V - 240 V AC
Motor Power	10 W	115 W	126 W
Rated Current	1 A	0.68 A	0.75 A
Motor Diameter	25 mm	35 mm	35 mm
Limit Turns	Electronic Limit	42 tum	42 tum
Running Time	≤ 4 Min	≤ 4 Min	≤ 4 Min
Max Load	5 Kg	18 Kg	35 Kg
Max Width	2.5 Mtr	3 Mtr	6 Mtr
Max Height	2.5 Mtr	3 Mtr	6 Mtr
Protection level	Ip44	Ip44	Ip44
Motor Weight	2 Kg	2.2 Kg	2.5 Kg

AUTOZON[®]

ENTRANCE AUTOMATION

Our Range of Products:



SLIDING GATE
OPERATOR



SWING GATE
OPERATOR



SLIDING GLASS
DOOR OPERATOR



SWING DOOR
OPERATOR



SLIDING WINDOW
OPERATOR



SWING WINDOW
OPERATOR



CURTAIN
OPERATOR



BLINDS
OPERATOR



BOOM
BARRIER



GARAGE
DOOR



ROLLING
SHUTTER



HIGHSPEED
DOOR



SECTIONAL
DOOR



BOLLARD



TYRE KILLER



GATE
HARDWARES

Applications:



RESIDENTIAL



INDUSTRY



AIRPORT



DEFENCE



PRISON



PUBLIC PARKING



SHOWROOMS



HOTEL



BUSINESS
CENTER



HOSPITAL

Corporate Office & Factory:

No.24, Vivekanandha Road,
Udayampalayam, Chinnavedampatti Post,
Coimbatore - 641049, Tamil Nadu, INDIA

Contact:

T : +91 75980 16000
M : +91 97872 55518

For more details:

Visit: www.autozonind.com | Email: info@autozonind.com

Sales And Services Network:

Coimbatore, Kochin, Thrissur, Chennai, Bangalore, Hyderabad, Mumbai, Delhi, Ahmedabad, Udaipur & Kolkata

